



DOSATRON®

WATER POWERED DOSING TECHNOLOGY



**ALLEN WOODS
ASSOCIATES, INC.**

SALES | ENGINEERING
REPRESENTATIVES

D25RE 5 IEAF-II


For Potassium
Carbonate Developer
Solution

Dilution Range:	1:100 to 1:20 (1% to 5%)
Water Flow Range:	.05 to 11 GPM
Operating Pressure Range:	4.3 to 85 PSI
Available Housing Materials:	Polyacetal (Standard Blue)
Includes:	Side-inject
Dimensions:	14" x 6 1/4"
Weight:	4 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104° F
Included Accessories:	6 ft clear suction tube, strainer, weight, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve, pressure regulator, flow restrictor.



Recommended Installation

IPK34 - 10 GPM Industrial Plumbing Kit

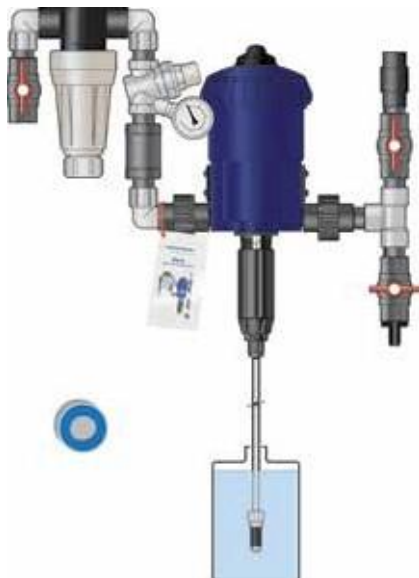

IPK34 - 10 GPM

- 3/4" schedule 80 PVC ball valve
- 3/4" poly 200 mesh tee filter
- 3/4" brass pressure regulator w/gauge
- 3/4" 10 GPM flow restrictor
- 3/4" polypropylene check valve
- 3/4" union
- 3/4" x 2" schedule 80 PVC fittings
- 3/4" x 1/2" barb fitting
- 3/4" T
- 3/4" street elbows
- Roll of Teflon tape
- Instruction card
- Zip tie

Allen Woods & Associates
2515 Clearbrook Drive
Arlington Heights, IL 60005
847-806-4000

www.allenwoodsgroup.com